

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
Please do not report the images to the  
Image Problem Mailbox.

## PATENT COOPERATION TREATY

PCT

NOTIFICATION OF THE RECORDING  
OF A CHANGE(PCT Rule 92bis.1 and  
Administrative Instructions, Section 422)

From the INTERNATIONAL BUREAU

To:

ORIGIN LIMITED  
52 Muswell Hill Road  
London N10 3JR  
ROYAUME-UNI

Date of mailing (day/month/year) 14 September 2000 (14.09.00)	<b>IMPORTANT NOTIFICATION</b>
Applicant's or agent's file reference MESS ARCH	
International application No. PCT/GB00/00385	International filing date (day/month/year) 09 February 2000 (09.02.00)

## 1. The following indications appeared on record concerning:

☐ the applicant      ☐ the inventor      ☒ the agent      ☐ the common representative

## Name and Address

ORIGIN LIMITED  
24 Kings Avenue  
London N10 1PB  
United Kingdom

## State of Nationality

## State of Residence

## Telephone No.

44 208 444 2148

## Facsimile No.

44 208 444 4137

## Teleprinter No.

## 2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

☐ the person      ☐ the name      ☒ the address      ☐ the nationality      ☐ the residence

## Name and Address

ORIGIN LIMITED  
52 Muswell Hill Road  
London N10 3JR  
United Kingdom

## State of Nationality

## State of Residence

## Telephone No.

44 208 444 218

## Facsimile No.

44 208 444 4137

## Teleprinter No.

## 3. Further observations, if necessary:

## 4. A copy of this notification has been sent to:

<input checked="" type="checkbox"/> the receiving Office	<input checked="" type="checkbox"/> the designated Offices concerned
<input checked="" type="checkbox"/> the International Searching Authority	<input type="checkbox"/> the elected Offices concerned
<input type="checkbox"/> the International Preliminary Examining Authority	<input type="checkbox"/> other:

<b>The International Bureau of WIPO</b> 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer  Maria Victoria CORTIELLO Telephone No.: (41-22) 338.83.38
--	--

# PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/GB 00/ 00385</b>	International filing date (day/month/year) <b>09/02/2000</b>	(Earliest) Priority Date (day/month/year) <b>11/02/1999</b>
Applicant <b>SYMBIAN LIMITED et al.</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

### 1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

### 4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

### 5. With regard to the **abstract**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

### 6. The figure of the **drawings** to be published with the abstract is Figure No.

☒ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

1  
☐ None of the figures.

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/IB 00/00385

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06F17/60

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX, IBM-TDB

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 49631 A (KONINKL PHILIPS ELECTRONICS NV ; PHILIPS AB (SE)) 5 November 1998 (1998-11-05) abstract page 1, line 21 - page 2, line 6 page 3, line 14 - line 29	1-23
A	US 4 837 798 A (ASTERWESL JANIS R ET AL) 6 June 1989 (1989-06-06) abstract figure 1	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

4 September 2000

Date of mailing of the international search report

08/09/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Schmidt, A

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 00/00385

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>CHUNG-MING HUANG ET AL: "MULTIMEDIA E-MAIL: THE EVOLUTION APPROACH BASED ON ADAPTERS" SOFTWARE PRACTICE &amp; EXPERIENCE, GB, JOHN WILEY &amp; SONS LTD. CHICHESTER, vol. 24, no. 9, 1 September 1994 (1994-09-01), pages 785-800, XP000655471 ISSN: 0038-0644 abstract</p> <p>-----</p>	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/00385

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9849631	A	05-11-1998	EP	0909420 A	21-04-1999
US 4837798	A	06-06-1989	CA	1261493 A	26-09-1989
			CA	1270584 B	19-06-1990
			CN	87103996 A, B	24-02-1988
			DE	3769766 D	06-06-1991
			EP	0270604 A	15-06-1988
			JP	2568602 B	08-01-1997
			JP	63503502 T	15-12-1988
			WO	8707801 A	17-12-1987




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>G06F 17/60</b>	<b>A2</b>	(11) International Publication Number: <b>WO 00/48099</b> (43) International Publication Date: 17 August 2000 (17.08.00)
(21) International Application Number: PCT/GB00/00385 (22) International Filing Date: 9 February 2000 (09.02.00) (30) Priority Data: 9903032.2 11 February 1999 (11.02.99) GB (71) Applicant (for all designated States except US): SYMBIAN LIMITED [GB/GB]; Sentinel House, 16 Harcourt Street, London W1H 1DS (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): GREENWELL, Thomas, Ralph, Edward [GB/GB]; 34 High Street, Bedmond, Abbots Langley, Herts WD5 0QX (GB). (74) Agent: ORIGIN LIMITED; 24 Kings Avenue, London N10 1PB (GB).		(81) Designated States: CN, GB, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i>

## (54) Title: MESSAGING ARCHITECTURE

## (57) Abstract

A messaging architecture is disclosed which enables a single messaging application, handling non-transport specific attributes and operations, to manipulate any commonly known message type (such as fax, e-mail, pager, SMS, voice mail) using dynamically loadable plug-ins which contribute the ability to handle all transport specific attributes and operations. This architecture results in a single in-box being presented to a user for browsing all incoming messages, irrespective of message type.

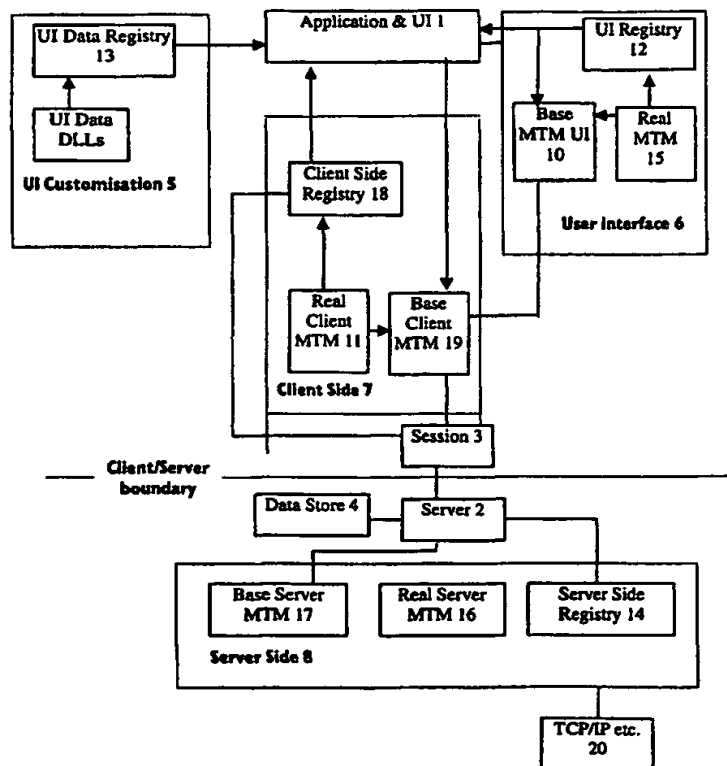

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China			PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		



## MESSAGING ARCHITECTURE

### Field of the Invention

5 This invention relates to a messaging architecture, and particularly to an architecture which can manipulate electronically generated messages such as e-mail, fax, video, pager, SMS and voice mail messages.

### Description of the Prior Art

10 E-mail messaging applications are widely used in computers to allow e-mail to be created, displayed, sent and received. Examples of widely used PC e-mail messaging applications include Eudora and Microsoft Outlook. Messaging applications are also available for other message types, such as fax, pager, and SMS.

15 The conventional messaging approach requires a different application for each message type. Hence, a user set up to receive multiple message types will typically have to (a) learn a number of different messaging applications and/or (b) browse through the in-box folders of each of these applications to review all incoming messages. This can be both burdensome and time consuming. For example, some messaging applications can handle multiple message types; a conventional e-mail  
20 client can send and receive attachments which can be text documents, a voice file or a fax image. However, each of these different kinds of attachments have to be opened within a different application.

### 25 Statement of the Present Invention

In accordance with a first aspect of the present invention, there is provided a method of manipulating electronically generated messages belonging to at least 2 of the following messages types: e-mail, fax, video, pager, SMS, voice mail; comprising the  
30 step of handling the electronically generated messages using a single messaging application.

Hence, the present invention is predicated on the insight that a messaging architecture comprising just a single messaging application can be constructed which can create, edit, display, send, receive, copy, move, delete and print. (the generic term 'manipulate' will be used to refer to any of these acts, or combinations of these acts)

5 the full range of current and likely future message types (e-mail, fax, video, pager, SMS and voice mail). The term 'messages' covers not only messages which are discrete units of information but also continuous information streams – i.e. streamed messages. It extends to information in any media format, including for example music files and video clips. The present invention may be used in wireless information

10 devices, smart phones, communicators and other handheld communications devices. It may also be used in other non-handheld environments, for example in the servers powering universal messaging web sites. All such hardware implementations are generically referred to as electronic communications apparatus.

15 This leads to considerable advantages over the prior art: the user only has to learn how to use a single application to deal with all incoming and outgoing messages; the user only has to browse a single application to see all received messages, irrespective of type (this feature is referred to as a 'universal in-box'); a single messaging application is likely to be more compact than a suite of messaging applications; and integration

20 with other applications (for example, a word processor which can implement features like 'Send As' – a feature which enables a user to select the type of message to be sent, e.g. fax, e-mail etc.) is simpler since the other applications only need to integrate with a single messaging application rather than many.

25 In one embodiment, the single messaging application handles certain attributes of messages which are shared by all supported message types and applies or invokes certain operations to the attributes of the messages which are applicable to all supported message types. Hence, the messaging application itself may be constrained to handle 'generic' attributes and apply or invoke 'generic' operations, where the term

30 'generic' means applicable across a very broad range of message types, including e-

mail, fax, video, pager, SMS and voice mail. The generic attributes may include subject/description, date, size, message type, body text, originator, first recipient (some message types may define multiple recipients and different recipient classes but these are not known to the core application), priority, and a 'flag' indicating whether the message has attachments. Hence, the content of these attributes can all be displayed by the messaging application, even though they might originate from a very broad range of different messaging types and applications within types. The generic operations which the messaging application is constrained to apply or invoke are 'manipulating', namely creating, editing, displaying, sending and receiving, copying and moving (both of which are defined to differentiate local and remote operations, distinguishing CopyFromLocal from CopyFromRemote, CopyToLocal and CopyToRemote), deleting and printing.

All *transport specific* attributes and operations (i.e. those attributes and operations specific to the fax message type, or the e-mail message type, etc.) are in one embodiment handled by components, known as MTMs (Message Type Modules) which are entirely separate from the messaging application but which can be invoked by the messaging application as and when needed. Invoking code as and when needed is far more efficient than having to load the entire suite of code relevant to all message types.

Handling generic and transport specific parts of messages separately also leads to many advantages. For example, the architecture facilitates an implementation of the 'universal in-box' feature. The architecture can also be readily expanded to support any new message type merely by deploying a suitable new MTM for that new message type. Preferably, that is achieved using dynamically linked code, although it can also be achieved using statically linked code (the disadvantage of statically linked code is that new message types can be covered only by producing and distributing a new version of the application). The manner in which new MTMs must be designed is relatively unconstrained by the requirements of the messaging application itself,

giving developers of MTMs greater design freedom. Finally, an application implementing a function (such as 'Send As') requiring integration with a messaging application does not need to know anything about the various message types that are available since it need deal only with generic parts of a message; forcing the application (for example, a word processor) to possess transport specific knowledge would prevent 'Send As' from being extensible as new message types are installed.

Alternative approaches to implementing a single, core messaging application capable of handling many message types include (a) pushing *all* message data into the specific part and (b) forcing the core messaging application to know the specific data for every message type. Whilst within the scope of the present invention, these approaches have several disadvantages. The first approach would mean that every new message type could behave perfectly with its data but would severely restrict the functionality available from the messaging application itself. The second approach would mean that the set of supported message types available in the application could not be extended without recompilation of the messaging application.

The messaging application may interface with one or more databases with loadable software code modules (sometimes referred to as DLLs – Dynamic Linked Libraries) relating to message type specific attributes and/or operations. A DLL is computer code which is (a) loaded into a program as required, rather than being pre-loaded, or (b) code which is linked on demand rather than being prelinked, or (c) code which is dynamically linked rather than statically linked, or (d) code which uses late binding rather than early binding. The term DLL is not used in this specification to refer to a DLL from any one vendor. The ability to manipulate new messaging types may then be dynamically added to a system whilst the system is fully operational (i.e. without the need for re-compilation) by adding the new loadable software code modules appropriate for the new message types to one or more databases.

As an example, *transport specific* elements of facsimile messages are in a preferred embodiment handled by a facsimile MTM (Message Type Module), whilst all generic parts are also handled by the messaging application. So if a high resolution fax is received, the messaging application itself has no ability to *know* or possess any *interest* in whether the message is high resolution or not. Instead, the facsimile MTM informs the messaging application which type of message the particular MTM handles (i.e. the facsimile type). The messaging application can interface through an API with a database of different message types and DLLs which can manipulate message data: this database is an example of what is called a Registry; in the detailed description which follows, it is the Registry called the UI Data Registry. Hence, the Registry loads up the DLL code to enable the messaging application to handle incoming facsimile messages appropriately. The facsimile MTM in effect populates the generic attributes in the messaging application (i.e. subject/description, date, size, message type, originator, recipient). Body text is also a generic field but is not used by received facsimile messages, for which the received data is effectively an image rather than text. The messaging application then simply displays the data in the generic attributes fields.

Each MTM is itself made up of a number (typically 5) of DLLs. Each of these DLLs fulfils a specific role: provision of text and numeric data for menus in the core application (this allows message type-specific behaviour to be launched from the messaging application); the UI required for the edit and display of messages; an interface layer between the UI and the message store; bridging code to interface between the internal storage of the message data and the standard protocol formats required for the message type; each MTM typically also utilises a DLL that can be used by one or more of the other DLLs.

The use of DLLs for message type specific behaviour means that the messaging application itself does not have to include the code required for detailed UI, data storage or protocol format aspects of each messaging type. As noted earlier, this builds

in the ability for different vendors to produce different UIs, giving product differentiation, and also means that new messaging types can be dynamically added to a system whilst the system is fully operational by adding new DLLs to the Registry.

5 In a second aspect, there is provided a software program for manipulating messages of a given type, comprising one or more loadable software code modules capable of interfacing with a single messaging application, the loadable software code modules relating to message type specific attributes and/or operations and the single messaging application being operable to manipulate electronically generated messages belonging  
10 to at least 2 of the following messages types: e-mail, fax, video, pager, SMS and voice mail.

Such a software program may be a dynamically loadable plug-in to the messaging application. Each loadable software code module may be individually capable of  
15 enabling the execution of one or more tasks from the following list of tasks:

- (a) Reporting to the messaging application the functional capabilities of one or more loadable software code modules;
- (b) Supplying text for on-screen menus;
- (c) Creating, and/or editing and/or displaying messages;
- 20 (d) Converting messages to be sent by the application to a protocol and format required by an external recipient and the conversion of messages received by the application to a protocol and format required by the messaging application.

25 The loadable software code modules are typically implemented as object oriented code which create real objects to execute tasks.

In a third aspect, there is provided a computer operating system comprising a single messaging application operable to handle at least 2 of the following messages types: e-mail, fax, video, pager, SMS, and voice mail. The operating system is preferably  
30

operable to participate in the performance of the first aspect of the method when used in conjunction with a software program defined in the second aspect.

In a forth aspect, there is provided a method of manipulating electronically generated messages using a messaging application, wherein the messaging application interfaces with several databases, each with loadable software code modules, each database individually enabling the execution of one or more tasks from the following list of tasks:

- (a) Reporting to the messaging application the functional capabilities of one or more loadable software code modules;
- (b) Supplying text for on-screen menus;
- (c) Creating, and/or editing and/or displaying messages;
- (d) Converting messages to be sent by the application to a protocol and format required by an external recipient and the conversion of messages received by the application to a protocol and format required by the messaging application.

This architectural approach, which can be referred to as multi-tiering, leads to several advantages, namely (1) the loading of an MTM component to deal with message-type-specific behaviour as required by the core application can be restricted to the functionality that is required at the time. For example, there is no need to load POP3 and SMTP protocol interface code while simply creating and editing an email message for later despatch from the device; conversely, when connected to a remote mailbox, the UI code for displaying an email message is not loaded. (2) Upgrades to the software can be provided in smaller components than would otherwise be the case. (3) The definition of strict APIs at each tier in the architecture allows for component development - a single component of an MTM can be developed in isolation with a relative guarantee that it will interoperate successfully with other components of the MTM.

In a fifth aspect, there is provided a computer system operable to perform the forth aspect of the invention when used in conjunction with the several databases defined in the forth aspect.

- 5 In a sixth aspect, there is provided electronic communications apparatus to perform any of the above inventive methods or programmed with any of the above inventive software.

### **Brief Description of the Drawing**

- 10 The invention will be described with reference to Figure 1, which is a functional overview of the messaging architecture envisaged in an embodiment of the present invention.

15

### **Detailed Description**

#### **Major Components**

- 20 The Messaging Architecture of the present invention is exemplified by the EPOC messaging architecture from Symbian Limited of the United Kingdom. The following discussion presumes some knowledge of object oriented software. For a detailed understanding of EPOC, a variety of public domain sources can be consulted, such as the WWW site [www.epoc.com](http://www.epoc.com), and freely available software developers kits for EPOC from Symbian Limited.

- 25 The architecture consists of three significant components - the *Message Server*, which provides true client/server access to all message data, an *Application Framework* which allows compliant plug-in components to be invoked by a *Core Application*. This Core Application is the Messaging Application 1, and the functionality supplied by the plug-in components is the implementation of any messaging protocol.



There are seven major components indicated by the diagram, as follows :

- The Messaging Application and its UI 1
- The Message Server 2, Client Sessions 3 and Message Data Store 4
- 5      • UI Customisation 5
- User Interface 6
- Client-side components 7
- Server-side components 8

10      The term 'Server' is used to refer to components which provide multiple shared access to a scarce resource (in this case, message files, serial ports and comms. devices). All components will typically be implemented in software within a single device, such as a smart phone or communicator.

15      The term 'Base' is used in the normal object orientation sense to refer to a declaration of what functions can be performed; the term 'Real' is used, again in the normal object orientation sense, to refer to how those functions will be performed.

20      The last four of the components above comprise the set of registerable plug-in components for a given MTM (Message Type Module). Typically, a real MTM will also have a utilities component which the other components can use, but this does not need to be stored in a given MTM Registry (the database of DLLs associated with a given MTM) because of support for explicit linkage in EPOC. This ensures that all DLLs that an application or DLL requires are loaded at the same time as the application or DLL.

### **The Messaging Application**

25      The core Messaging Application 1 within EPOC knows nothing about specific messaging protocols, and can only interact with generic APIs (Application Programming Interfaces). These generic, or base, APIs define functionality that must be provided by any plug-in components that are to be registered as MTMs. From the

user's point of view, the core application is the entry point to all messaging functionality on the EPOC device. The application contains, for all message types, the Inbox, Outbox and all folder manipulation for message storage. The actual appearance of the Inbox and Outbox can be different for each different message type which is supported.

The *Inbox* is, from the user's perspective, the list of all messages recently received onto the user's device and not yet dealt with. The Application 1 creates this view by first creating a Session 3 on the Message Server 2 - this allows the Application 1 to walk through the list of stored messages and display from each message the generic data that it stores. Drawing the Inbox in this way does not require the use of any message-type-specific data, and hence does not require the loading of any MTMs.

The Outbox and any local folder view are drawn in exactly the same way - since the user can only see generic data fields in those views (things like the message description or subject, date, size, priority and so on), the Application 1 does not need to invoke any type-specific functionality in the registered MTMs. The Inbox and Outbox are just special cases of *folder views* - views of the message store which group the messages together by their logical 'location', in which the concept of a folder is used to allow grouping of related messages together.

There is one exception to the rule of the Application 1 not needing to load any message type-specific functionality. This is the generation by the application of message type-specific menu items on the folder view. For example, the folder view always provides the options of creating a new message or receiving a fax. This functionality cannot be provided by the core Application 1 since it requires knowledge of individual message types. This leads us to the need for the UI Customisation 5 component, the first example of a registered MTM component.

### MTM Registries

In each of the UI 6, Client Side 7 and Server Side 8 blocks of the application framework (as shown in the diagram), use of an implemented component is never direct. Every MTM component used by the core Application 1, for example, is only  
5 accessed through the base API, either the 'Base MTM UI' 10 API or the 'Base Client MTM' 11 API. The core Application 1 knows these APIs and knows what kind of behaviour to expect when it invokes a given function in a base API. However, it does not know *exactly* what will happen since this depends on the type of message that is being manipulated.

10

The core Application 1 has to know that the real action it is invoking is related to the real message that is being manipulated. For example, it would be meaningless and probably dangerous for the Application 1 to give an e-mail message to code designed to work on fax messages. The application framework, and in particular the registries  
15 (i.e. the UI Registry 12, the UI Data Registry 13 and the Server Side Registry 14), prevent this misalignment of function and data by associating every message with a *type*. All interactions with message objects require the application to supply a type ID - this is simply a number that has no meaning other than to ensure that the Application 1, the Registry (12, 13 or 14), the MTM component created by the Registry and the  
20 message object created by the MTM are all dealing with the same type. This check is made throughout the application framework to ensure that data is not being mishandled.

25

The general operation of a Registry (of any type) is to load a DLL which contains code that can manipulate message objects of a given type. All MTM components must satisfy the appropriate base class API for the level of the application framework at which the component is to operate. The core Application 1 (or the Message Server 2, in the case of server-side MTM components) only deals with this base API and so it is essential that the real implementation of an MTM is correct.

## UI Customisation

Fundamental to the utility of the Messaging Application framework is the ability of a registered component to be able to report what it can and cannot do, to the application. This is used through the QueryCapability function in the base API.

5

For example, when the user accesses the 'Create New Message' menu item, the Application 1 must be able to determine which of the registered MTMs can actually define messages locally and then transmit them from the device. An example of a message type which supports 'sending' is fax or email; Cell Broadcast Service (a  
10 GSM protocol which allows text delivery to all suitably-equipped handsets in a cell) is receive-only. Each time the core Application 1 needs to know a particular capability for each of the registered message types, which has a simple yes/no answer (e.g. 'Can send messages', 'Can support attachments') or which has a simple numeric answer (e.g. 'Maximum message size' or 'Maximum number of attachments'), it invokes the  
15 UI Data Registry 13. This allows retrieval of the required data without having to load the entire MTM.

As indicated above, the UI Data component 13 of an MTM can also supply an entire menu command to the core Application 1. In this case, the registered MTM supplies a  
20 text string (for the menu) and a function number to the Application 1. When the user selects the relevant menu item from the folder view, the Application 1 calls back to the InvokeFunction API of the relevant MTM, passing back the function number that was originally supplied with the menu text string. At this point, the Application 1 has interacted not only with the UI Data Registry 13, but also with the User Interface  
25 Registry 12, and has loaded up the UI component for the appropriate MTM.

## User Interface

When the Application 1 is required to display and/or edit a message of a known type, it must first ensure that it has an editor/viewer object from the correct MTM. This is done through the UI Registry 12. The application gives the Registry the ID (simply a

number which has no meaning to the application), and the UI Registry 12 uses it to look up which DLL should be loaded. This look-up is done through a database of installed message types - the registration of a message type involves writing (among other things) its human-readable name and definition of which DLL contains the appropriate code to achieve the message type specific behaviour that is required.

The Base MTM UI 10 API provides generic functions such as 'Edit' to the core Application 1. The Real MTM 15 object includes all the data structures and code required to manipulate e-mail.

It is simply by invoking these functions that the Application 1 launches the editor and viewer objects for each message type. Implementation specific features - such as whether the message can have attachments, or whether a spell checker is available for the message body - are invisible to the core Application 1, and are only known within the Real MTM 15 on the diagram.

The UI components of an MTM know about the message type-specific data storage as well as the generic parts of the message. This knowledge is usually encapsulated in a few classes that are stored in the utility DLL mentioned earlier - this allows the client-side and server-side components within that MTM to access the same classes. This sharing of code is particularly important for storing and restoring message data - only one class should be aware of the storage format for an email, for example, and that class should be used wherever it is necessary to save or retrieve emails.

### **Client-side MTM Components**

Much of the functionality that the UI components of an MTM supply can also be accessed through the client-side MTM component (i.e. Client Side Registry 18, Real Client MTM 11 and Base Client MTM 19). The significant difference is that nothing that the client-side components supply requires any user interface. This allows any

external application to hook up to the messaging architecture and interact with message-type-specific data. The core messaging Application 1 is capable of using client-side components as well as UI components, but in practice the UI components supply sufficient functionality that this is not necessary.

5

The greater use of the client-side components will be in automation of messaging processes, where user interaction is not required. Examples of this are typically found in smart messaging, in which the EPOC device receives an incoming SMS message (the SMS MTM has been written so that it is always ready to receive a message without user intervention) and handles the data automatically and perhaps immediately. The data could be an Agenda entry, an electronic Business Card from a new contact or perhaps settings data for a new internet account. Client-side processes looking out for new messages of a particular type(s) will need to load the relevant client-side MTM to be able to interact with the data correctly.

10

### **Server-Side MTM Components**

15

Being able to handle message data in a common fashion within the Application 1 is only half the true requirement for a single messaging application that supports a Universal Inbox. It is also essential that message data can be converted to and from the formats that are used in the 'real world'. This is the job of the Server-side components of the MTMs (i.e. the Server Side Registry 14, Real Server MTM 16 and Base Server MTM 17).

20

For example, an incoming email will generally consist of a header and a number of body parts, all defined in normal ASCII text. An incoming SMS is formed in compliance with the relevant ETSI spec, and is a tightly-packed frame of 256 bytes of human unreadable binary data - it has to be decoded and converted before any sense can be made of it by a person.

25

Since every message type requires its own user interface and storage code to cater for attributes that are not found in other message types, and since every message type has different protocol and formatting requirements, it follows that the bridging software (between the internal storage of a message and the appearance it must have to be recognised off the device) must also be provided in a message-type-specific fashion to be loaded as appropriate.

### **An example: Creating and sending an e-mail**

First, the messaging Application 1 interfaces with the UI Data Registry 13 using an appropriate API; the messaging Application 1 then issues a QueryCapability to all of the registered MTMs to determine which ones can send messages. It then creates a cached list of all registered MTMS which are capable of sending a message of any type.

The UI Data Registry 13 passes to the Application 1 the text string for the human readable name of the message types capable of sending messages for use in creating the menu for the inbox (or other folder view). Hence, for each message type that *can* send messages, the human-readable name is displayed on the side menu when the user selects 'Create new' on the folder view menu.

The Application 1 then takes the Message type ID appropriate to the name chosen by the user (in this case, 'e-mail'), and submits it to the UI Registry 12, requesting a component that can handle the generic and transport specific data of e-mail. (The messaging application could also submit the e-mail Message type ID to the Client Side Registry and the Client Side Registry could then undertake all the steps, described below, which are taken by the UI Registry.) The UI Registry 12 then creates a real e-mail object: the Real MTM 15 shown in the figure. The Real MTM 15 includes all the data structures and code required to manipulate e-mail. The messaging application then transacts with the generic message APIs in the Base MTM UI 10.

The UI Registry 12 loads the DLL which has been registered as containing the Email editor, and returns to the application a pointer to a function which can be used to create an Email editor object. The core Application 1 knows that all editors, regardless of type, supply a function 'Create' which will create a new message and display it to the user for definition. The Application 1 is unaware of the actual type of the message (it only had a number which it got from the menu and passed direct to the UI Registry 12), but the user sees a real email editor with all the fields he expects to see. When the user starts entering a new message, the Server 2 is asked to create a new Data Store 4 to hold the message. The Server 2 tells the Real Client MTM 11 the address of the Data Store 4 and how to write to it. When the user is satisfied with the email, he selects 'Close' on the editor's menu (note that this is within message-type-specific code) and the email editor saves all parts of the message - the generic fields, the email-specific data and the body text.

To send a message, the user browses the Outbox and selects the 'Send' function. If all messages are e-mails, then the messaging Application 1 submits the e-mail Message type ID to the Client Side Registry 18. The Client Side Registry 18 then creates the Real Client MTM 11 object: that opens up the correct data store for the message and performs any preparation required (e.g. checking that any attachments are still in existence). The Application 1 then creates a Session 3 to tell the Server 2 that it wants to send a message, which has been given a unique identifying number. The Server checks the Message type ID and loads up the correct Real Server MTM 16. The Base Server MTM 17 includes the operation 'Send'; once activated, the Real Server MTM 16 opens the message and works out the correct support components, such as TCP/IP 20. It then performs the required encoding (typically Base 64) of any attachments, and then transmits the message. After transmission, it closes the Data Store 4 file, tags it as successfully sent and then tells the Session 3 that the message has been sent.



**Claims**

- 5        1.        A method of manipulating electronically generated messages belonging to at least 2 of the following messages types: e-mail, fax, video, pager, SMS, voice mail; comprising the step of handling the electronically generated messages using a single messaging application.
- 10       2.        The method of manipulating electronically generated messages as in Claim 1 wherein the single messaging application handles certain attributes of messages, these attributes being shared by all of the message types.
- 15       3.        The method of manipulating electronically generated messages as in Claim 2 wherein the single messaging application invokes or applies certain operations to the attributes of the messages, these operations being applicable to all of the message types which are capable of being manipulated by the messaging application.
- 20       4.        The method of manipulating electronically generated messages as in Claim 3 wherein the messaging application interfaces with one or more databases of loadable software code modules relating to message type specific attributes and/or operations.
- 25       5.        The method of manipulating electronically generated messages as in Claim 4, wherein a new messaging type can be dynamically added to a system whilst the system is fully operational by adding new loadable software code modules to one or more databases.

6. The method of manipulating electronically generated messages as in Claim 3 wherein all user interface code is accessed through a database using loadable software code modules.
- 5 7. A software program for manipulating messages of a given type, comprising loadable software code modules capable of interfacing with a single messaging application, the loadable software code modules relating to message type specific attributes and/or operations and the single messaging application being operable to manipulate electronically generated messages
- 10 belonging to at least 2 of the following messages types: e-mail, fax, video, pager, SMS and voice mail.
8. The software program as claimed in Claim 7 wherein the software program is a dynamically loadable plug-in to the messaging application.
- 15 9. The software program as claimed in Claim 7 wherein each loadable software code module is individually capable of enabling the execution of one or more tasks from the following list of tasks:
- 20 (a) Reporting to the messaging application the functional capabilities of one or more loadable software code modules;
- (b) Supplying text for on-screen menus;
- (c) Creating, and/or editing and/or displaying messages;
- (d) Converting messages to be sent by the application to a protocol and format required by an external recipient and the conversion of
- 25 messages received by the application to a protocol and format required by the messaging application.
10. The software program as claimed in Claim 9 wherein the loadable software code is object oriented code which creates real objects to execute a task.

11. A software program messaging application capable of manipulating electronically generated messages belonging to at least 2 of the following messages types: e-mail, fax, video, pager, SMS, and voice mail.
- 5 12. A computer operating system comprising a single messaging application operable to handle at least 2 of the following messages types: e-mail, fax, video, pager, SMS, and voice mail.
- 10 13. An operating system operable to participate in the performance of any preceding method claim when used in conjunction with a software program defined in Claims 7 to 10.
- 15 14. A method of manipulating electronically generated messages using a messaging application, wherein the messaging application interfaces with several databases, each with loadable software code modules, each database individually providing code modules relevant to the execution of one or more tasks from the following list of tasks:
- 20 (a) Reporting to the messaging application the functional capabilities of one or more loadable software code modules;
- (b) Supplying text for on-screen menus;
- (c) Creating, and/or editing and/or displaying messages;
- 25 (d) Converting messages to be sent by the application to a protocol and format required by an external recipient and the conversion of messages received by the application to a protocol and format required by the messaging application.
- 30 15. The method of manipulating electronically generated messages as in Claim 14, wherein appropriate software code modules are loaded only when required by the messaging application.

16. The method of manipulating electronically generated messages as in Claim 14 wherein the messaging application can handle at least 2 of the following messages types: e-mail, fax, video, pager, SMS, voice mail.
- 5 17. The method of manipulating electronically generated messages as in Claim 16 wherein code to manipulate each message type is accessed using several databases, each with loadable software code modules, each database individually providing code modules relevant to the execution of one or more tasks from the list of tasks defined in Claim 14.
- 10 18. The method of manipulating electronically generated messages as in Claim 17 wherein the application can be enhanced to manipulate a new messaging type without re-compilation, by adding loadable software code modules to one or more databases with which the application can interface, each database
- 15 providing code modules relevant to the execution of one or more of the tasks defined in Claim 14.
19. A software program for manipulating messages of a given type, comprising one or more databases capable of interfacing with a single messaging
- 20 application, the one or more databases providing registered information about installed loadable software code modules relating to message type specific attributes and/or operations, each database individually providing code modules relevant to the execution of one or more of the tasks defined in Claim 14.
- 25 20. The software program as claimed in Claim 19 being a dynamically loadable plug-in to the messaging application.
21. The software program as claimed in Claim 20 wherein the loadable software
- 30 code is object oriented code which creates real objects to execute a task.

22. An electronic communications apparatus programmed to perform the method of any of Claims 1 – 6, or 14 – 18,

5

23. An electronic communications apparatus programmed with the software of any of claims 7 - 13, or 19 – 21.

10

15

20

25

30

1/1

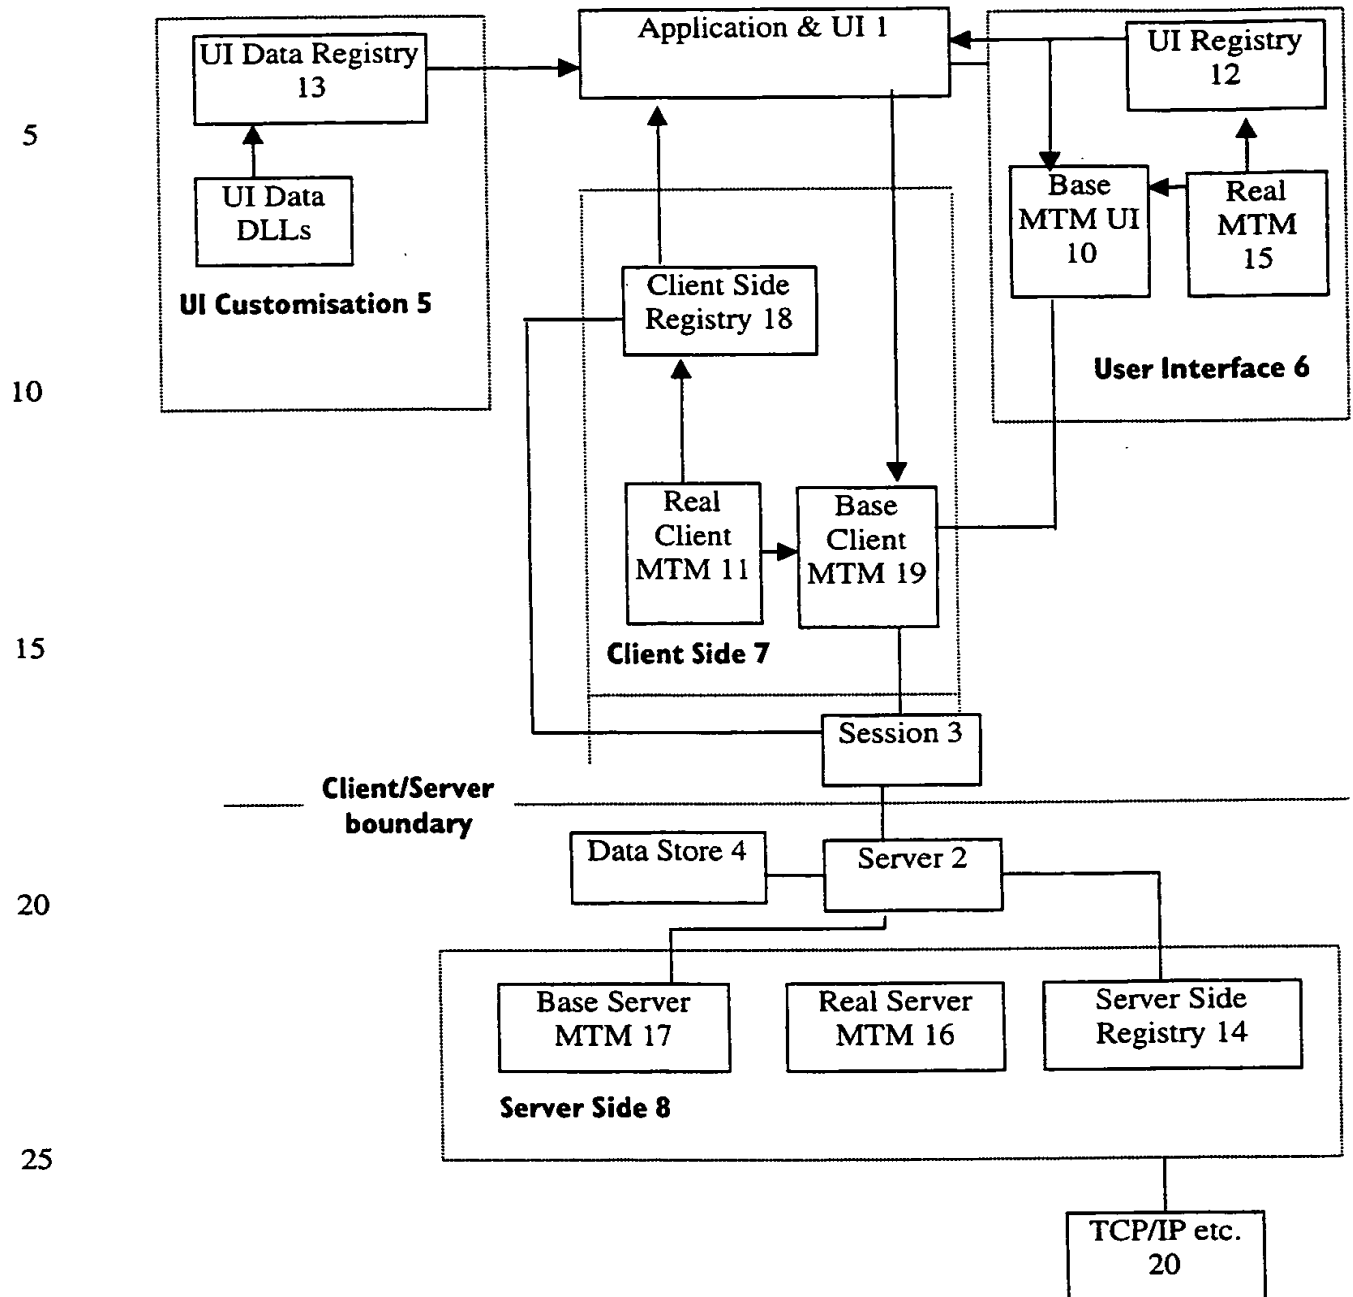


Figure 1

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
17 August 2000 (17.08.2000)

PCT

(10) International Publication Number  
**WO 00/48099 A3**

(51) International Patent Classification<sup>7</sup>: **G06F 17/60**

Thomas, Ralph, Edward [GB/GB]: 34 High Street, Bedmond, Abbots Langley, Herts WD5 0QX (GB).

(21) International Application Number: **PCT/GB00/00385**

(74) Agent: **ORIGIN LIMITED**; 52 Muswell Hill Road, London N10 3JR (GB).

(22) International Filing Date: 9 February 2000 (09.02.2000)

(25) Filing Language: **English**

(81) Designated States (*national*): CN, GB, JP, US.

(26) Publication Language: **English**

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

(30) Priority Data:  
9903032.2 11 February 1999 (11.02.1999) **GB**

Published:  
— with international search report

(71) Applicant (*for all designated States except US*): **SYMBIAN LIMITED** [GB/GB]; Sentinel House, 16 Harcourt Street, London W1H 1DS (GB).


(88) Date of publication of the international search report:  
29 November 2001

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **GREENWELL,**

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **MESSAGING ARCHITECTURE**

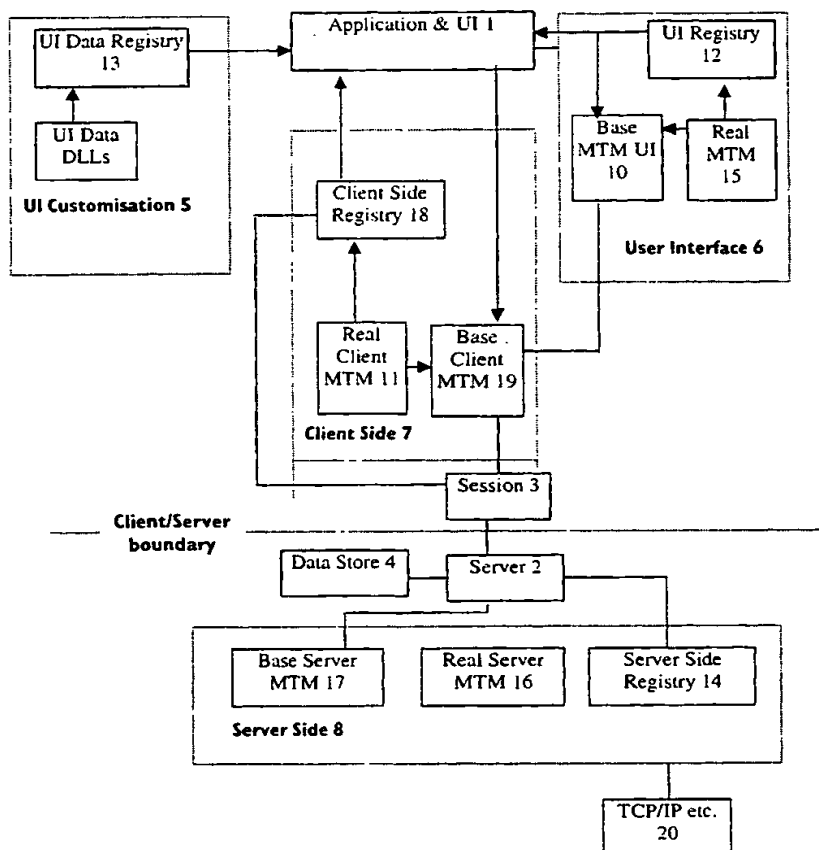

(57) **Abstract:** A messaging architecture is disclosed which enables a single messaging application, handling non-transport specific attributes and operations, to manipulate any commonly known message type (such as fax, e-mail, pager, SMS, voice mail) using dynamically loadable plug-ins which contribute the ability to handle all transport specific attributes and operations. This architecture results in a single in-box being presented to a user for browsing all incoming messages, irrespective of message type.

# INTERNATIONAL SEARCH REPORT

Internat. Application No  
PCT/GB 00/00385

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06F17/60

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX, IBM-TDB

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 49631 A (KONINKL PHILIPS ELECTRONICS NV ;PHILIPS AB (SE)) 5 November 1998 (1998-11-05) abstract page 1, line 21 -page 2, line 6 page 3, line 14 - line 29	1-23
A	US 4 837 798 A (ASTERWESL JANIS R ET AL) 6 June 1989 (1989-06-06) abstract figure 1	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

4 September 2000

Date of mailing of the international search report

08/09/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Schmidt, A



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/00385

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>CHUNG-MING HUANG ET AL: "MULTIMEDIA E-MAIL: THE EVOLUTION APPROACH BASED ON ADAPTERS" SOFTWARE PRACTICE &amp; EXPERIENCE, GB, JOHN WILEY &amp; SONS LTD. CHICHESTER, vol. 24, no. 9, 1 September 1994 (1994-09-01), pages 785-800, XP000655471 ISSN: 0038-0644 abstract</p> <p style="text-align: center;">-----</p>	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat. Appl. No.

PCT/GB 00/00385

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9849631	A	05-11-1998	EP	0909420 A	21-04-1999
US 4837798	A	06-06-1989	CA	1261493 A	26-09-1989
			CA	1270584 B	19-06-1990
			CN	87103996 A, B	24-02-1988
			DE	3769766 D	06-06-1991
			EP	0270604 A	15-06-1988
			JP	2568602 B	08-01-1997
			JP	63503502 T	15-12-1988
			WO	8707801 A	17-12-1987